


Gannon Earthcavator Brochure

EARTHCAVATOR

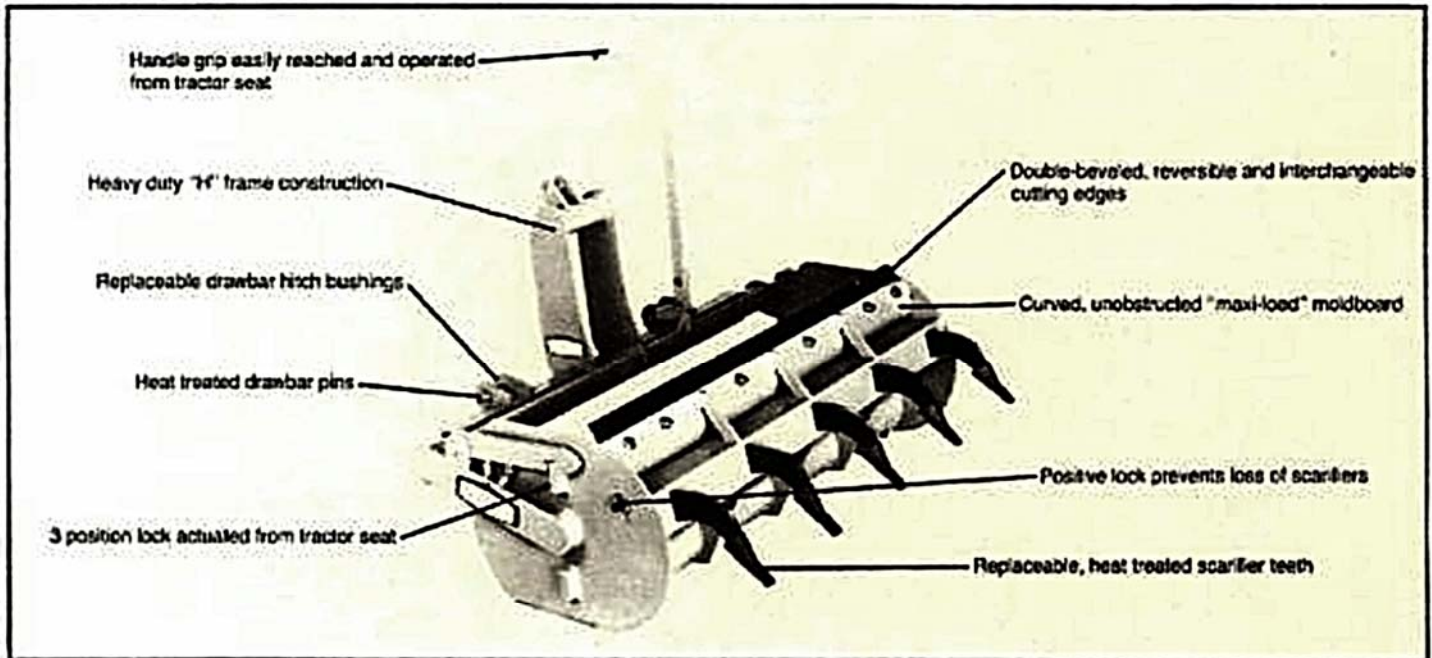

Gannon reserves the right to make design or specification changes without notice for product improvement.

SPECIFICATIONS

Gannon Model	Width of Cut (Inches)	Overall Width (Inches)	Height of Moldboard (Inches)	Overall Height (Inches)	Length of End Plate (Inches)	Overall Depth (Inches)	Capacity (cu. ft.)	Weight (lbs)	No. of Scarifiers	Cutting Edges	Hitch Category
FD-036-02	36	39½	11½	14¾	16	25	3.8	140	4	2	* (1)
FD-036-15	36	39½	11½	14¾	16	25	3.8	143	4	2	* (2)
FD-036-16	36	39½	11½	14¾	16	25	3.8	144	4	2	* (3)
FD-042-02	42	45½	16	14¾	16	25	4.5	155	5	2	* (1)
FD-042-15	42	45½	16	14¾	16	25	4.5	158	5	2	* (2)
FD-042-16	42	45½	16	14¾	16	25	4.5	159	5	2	* (3)
FDH-042	42	45½	16	14¾	16	25	4.5	410	4	2	* (4)
FD-048	48	52½	20	34	24	42	12.9	462	5	2	
FD-054	54	58¾	20	34	24	42	14.2	488	5	2	
FD-060	60	65½	20	34	24	42	15.8	527	5	2	
FD-100	65	70	20	35	24	44	17.1	660	6	2	
FD-200	72	76½	20	35	24	44	19.0	712	7	2	
FD-300	76	82	20	35	24	44	20.0	866	7	2	
FD-400	80	86	20	35	24	44	21.1	895	7	2	

- * (1) ASAE standard Category 0
- (2) Category 0 w Category 1 pins
- (3) Roper and Sears sleeve hitch
- (4) Special for Kubota B7200, Ford 1220 or equivalent

- * (1) ASAE standard Category 0
- (2) Category 0 w Category 1 pins
- (3) Roper and Sears hitch
- (4) Special for Kubota B7200, Ford 1220 or equivalent